

IPC Medium-pressure internal gear pumps

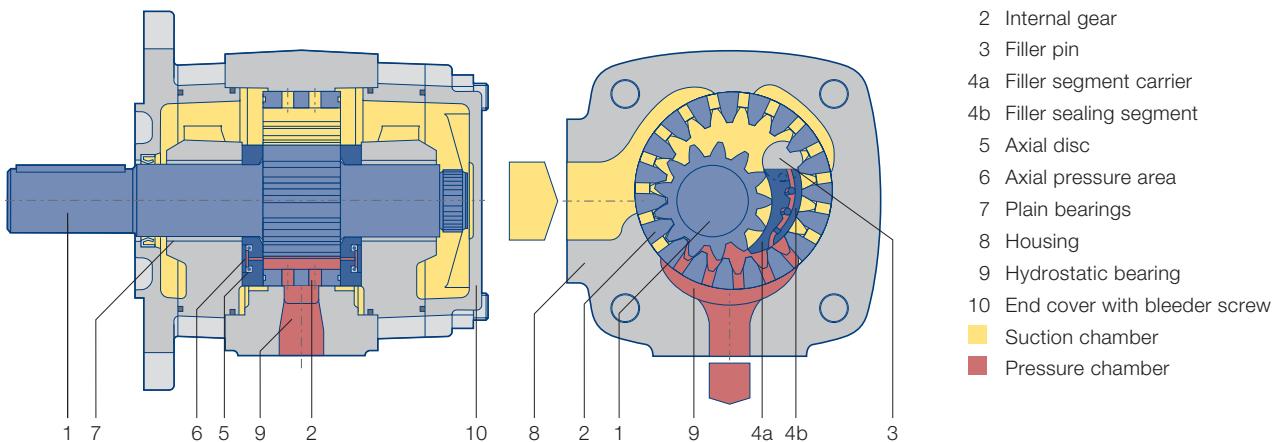
Technical data sheet



Advantages

- + High volumetric and overall efficiency
- + Very good pulsation behavior
- + Robust and compact
- + Low noise emission
- + Multiple flow capable

Design and function



Function

By rotation of the gears inside the pump, the pressure fluid (usually hydraulic oil) is drawn into the cavity between the pinion and internal gear. Optimized cross-sectional areas on suction side as well as on pressure side allow operation over a wide range of speed.

In the radial direction, the gear chambers are closed by gear meshing and the filler piece. In the axial direction, the axial plates seal the pressure chamber with the minimal possible gap. This design minimizes volume losses and increases efficiency.

Calculations

$$\text{Pump flow } Q = V_{g\text{ th}} \cdot n \cdot \eta_v \cdot 10^{-3} [\text{l/min}]$$

$$\text{Power } P = \frac{Q \cdot \Delta p}{600 \cdot \eta_g} [\text{kW}]$$

$V_{g\text{ th}}$ pump volume per revolution [cm^3]

n Speed [rpm]

η_v Volumetric efficiency

η_g Overall efficiency

Δp Differential pressure [bar]

Technical data

Design	Internal gear pump with radial and axial sealing gap compensation
Type	IPC
Mounting types	SAE hole flange; ISO 3019/1 or VDMA hole flange; ISO 3019/2
Line mounting	SAE suction and pressure flange J 518 C Code 61
Sense of rotation	right or left-hand rotation
Mounting position	any
Shaft load	for details of radial and axial drive shaft loads please contact J.M. Voith SE & Co. KG
Input pressure	0.8...3 bar absolute pressure (at start up for short time 0.6 bar)
Preload pressure. pressure port (in reversing mode)	for details please contact J.M. Voith SE & Co. KG
Pressure fluid	HLP mineral oils DIN 51524. part 2 or 3
Viscosity range	10 ... 300 mm^2s^{-1} (cSt)
Permissible start viscosity	max. 2000 mm^2s^{-1} (cSt)
Permissible temperature of the pressure fluid	-20 ... +80 °C
Required purity of the pressure fluid	Class 20/18/15 (ISO 4406). Class 8 (NAS 1638)
Filtration	filtration quotient min. $\beta_{20} \geq 75$. recommended $\beta_{10} \geq 100$ (longer life)
Permissible ambient temperature	-20 ... +60 °C

Characteristics

Type. size – delivery	Displacement per revolution [cm ³]	Speed min. [rpm]	Speed max. [rpm]	Delivery at 1500 rpm [l/min]	Con-tinuous pressure [bar]	Peak pressure at 1500 rpm [bar]	Peak pressure at n _{max} [bar]	Moment of inertia [kg cm ²]
IPC 3 – 3.5	3.6	400	3600	5.4	330	345	345	0.34
IPC 3 – 5	5.2	400	3600	7.8	330	345	345	0.42
IPC 3 – 6.3	6.4	400	3600	9.6	330	345	345	0.49
IPC 3 – 8	8.2	400	3600	12.3	330	345	345	0.58
IPC 3 – 10	10.2	400	3600	15.3	330	345	345	0.70
IPC 4 – 13	13.3	400	3600	19.9	330	345	345	2.25
IPC 4 – 16	15.8	400	3600	23.7	330	345	345	2.64
IPC 4 – 20	20.7	400	3400	31.0	330	345	345	3.29
IPC 4 – 25	25.4	400	3200	38.1	300	330	330	3.70
IPC 4 – 32	32.6	400	2800	48.9	250	280	280	4.44
IPC 5 – 40	41.0	400	2800	61.5	315	345	315	10.20
IPC 5 – 50	50.3	400	2500	75.4	280	315	280	11.60
IPC 5 – 64	64.9	400	2200	97.3	230	250	250	14.40
IPC 6 – 80	80.7	400	2400	121.0	280	315	280	30.90
IPC 6 – 100	101.3	400	2100	151.9	250	300	270	36.10
IPC 6 – 125	126.2	400	1800	189.3	210	250	250	43.70
IPC 7 – 160	160.8	400	2000	241.2	280	315	280	102.60
IPC 7 – 200	202.7	400	1800	304.0	250	300	270	119.00
IPC 7 – 250	251.7	400	1800	377.5	210	250	250	144.50

The values given apply for

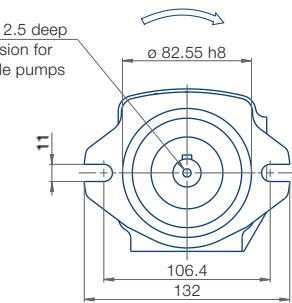
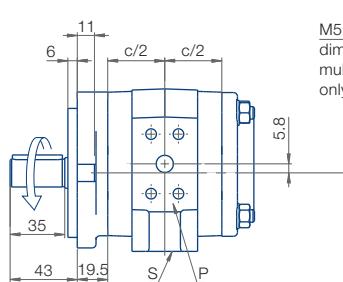
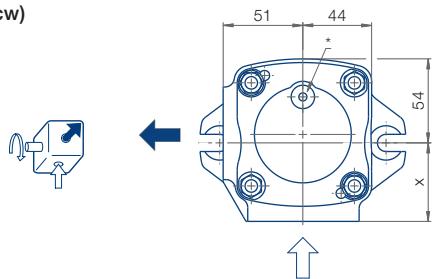
- Pumping of mineral oils with a viscosity of 20 ... 40 mm²s⁻¹
- An input pressure of 0.8...3.0 bar absolute

Notes




- Peak pressures apply for 15 % of operating time with a maximum cycle time of 1 minute
- Please inquire about peak pressures at non-standard speeds
- Due to production tolerances, the pump volume may be reduced by up to 1.5 %.

IPC Size 3, Rotation and dimensions (mounting flange 0, shaft end 1)


Rotation clockwise (cw)




Rotation counter-clockwise (ccw)

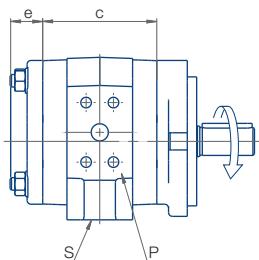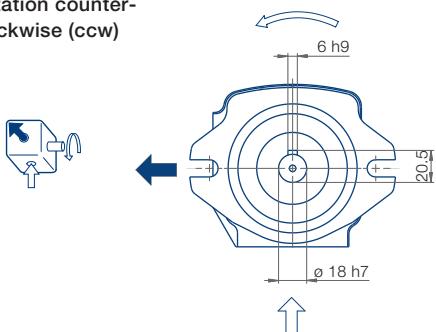

Pressure port (P)


















Suction port (S)



Type / Delivery	c [mm]	x [mm]	e [mm]	g [mm]	h [mm]	i [mm]	k [mm]	l Thread	r [mm]	v [mm]	w Thread	Weight [kg]	SAE Flange No.
IPC 3 – 3.5	66	47.2	20.5	9	15	38.1	17.5	M8x13	38.1	17.5	M8x15	3.4	10
IPC 3 – 5	70	47.2	20.5	11	15	38.1	17.5	M8x13	38.1	17.5	M8x15	3.6	10
IPC 3 – 6.3	73	50.2	20.5	11	20	47.6	22.3	M10x15	38.1	17.5	M8x15	3.8	10
IPC 3 – 8	77.5	50.2	20.5	13	25	52.4	26.2	M10x15	38.1	17.5	M8x15	4.0	10
IPC 3 – 10	82.5	51.5	20.5	13	25	52.4	26.2	M10x15	38.1	17.5	M8x15	4.2	12

* Ensure the M10x1plug screw, hexagon socket SW5, is tightened to a torque of 10 Nm during pumping operation.
Dependent on the pump position, filling or ventilation is possible here prior to commissioning.

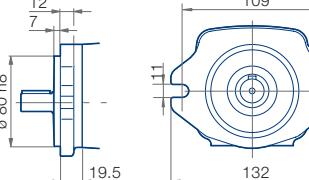
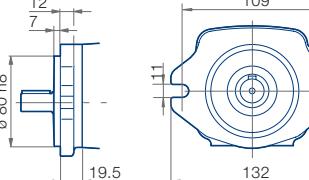

IPC Size 3, Designs and dimensions

Rotation, Suction port	Mounting flange	Shaft end
Standard		
Rotation clockwise, Suction port pump	SAE 2-hole flange 	Keyway connection 
 1	 0	 1
Variants		
Rotation counterclockwise, Suction port pump	SAE 2-hole flange 	Keyway connection 
 6	 0	 1
Rotation clockwise*, Suction port pump	SAE 2-hole flange 	Involute gearing  ANSI B92.1a 11T 16/32 DP 30°
 1	 0	
Rotation counterclockwise*, Suction port pump	VDMA-2-hole flange 	Keyway connection 
 6	 4	 1




* Direction of rotation free selectable in the illustrated mounting flange/shaft end combination.

IPC Size 4, Rotation and dimensions (mounting flange 7, shaft end 1)

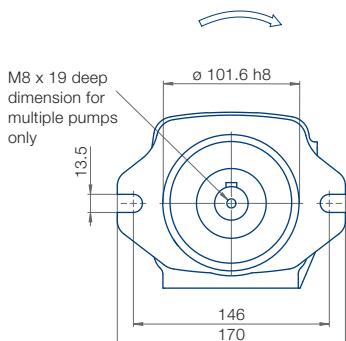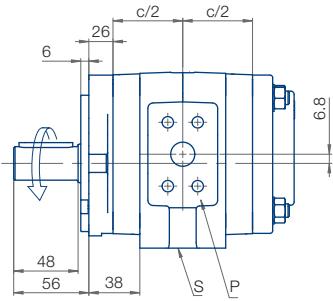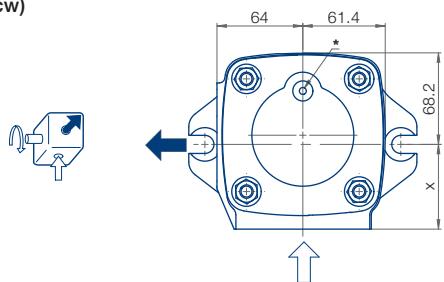
Rotation clockwise (cw)




Rotation counter-clockwise (ccw)

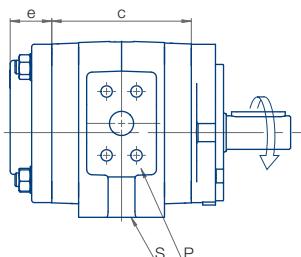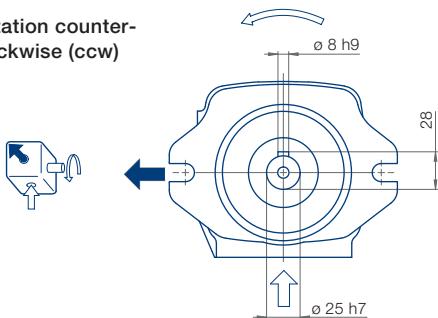

Pressure port (P)



Suction port (S)










Type / Delivery	c [mm]	x [mm]	e [mm]	g [mm]	h [mm]	i [mm]	k [mm]	l Thread	r [mm]	v [mm]	w Thread	Weight [kg]	SAE Flange No.	
IPC 4 - 13	88.5	57.2	31	14	25	52.4	26.2	M10x15	38.1	17.5	M8x13	7.8	10	12
IPC 4 - 16	92.5	57.2	31	18	30	58.7	30.2	M10x15	47.6	22.3	M10x15	8.1	11	13
IPC 4 - 20	98	57.2	31	18	30	58.7	30.2	M10x15	47.6	22.3	M10x15	8.4	11	13
IPC 4 - 25	104	63.2	31	18	40	69.9	35.7	M12x20	47.6	22.3	M10x15	8.6	11	30
IPC 4 - 32	113	63.2	31	18	40	69.9	35.7	M12x20	47.6	22.3	M10x15	9.2	11	30

* Ensure the M10x1plug screw, hexagon socket SW5, is tightened to a torque of 10 Nm during pumping operation.

Dependent on the pump position, filling or ventilation is possible here prior to commissioning.

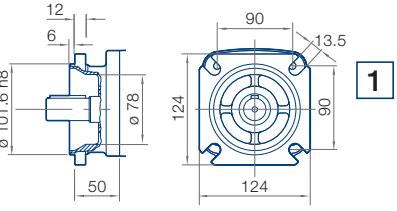
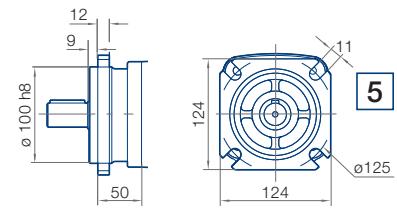

IPC Size 4, Designs and dimensions

Rotation, Suction port	Mounting flange	Shaft end
Standard		
Rotation clockwise, Suction port pump	SAE 2-hole flange  7	Keyway connection  1
Variants		
Rotation counterclockwise, Suction port pump	SAE 2-hole flange  7	Keyway connection  1
Rotation clockwise*, Suction port pump	SAE 2-hole flange  7	Involute gearing  0 ANSI B92.1a 15T 16/32 DP 30°
Rotation counterclockwise*, Suction port pump	SAE 4-hole flange  1	Keyway connection  1
	VDMA-4-hole flange  5	Keyway connection  1




* Direction of rotation free selectable in the illustrated mounting flange/shaft end combination.

IPC Size 5, Rotation and dimensions (mounting flange 0, shaft end 1)

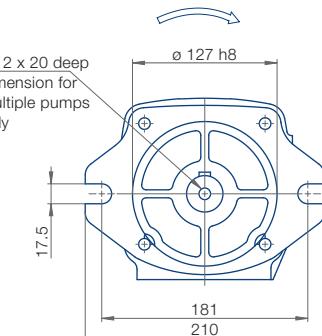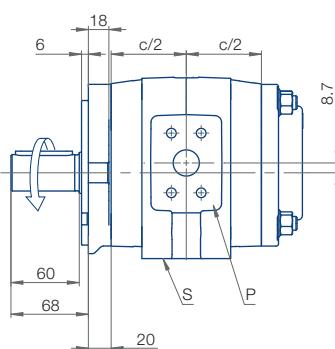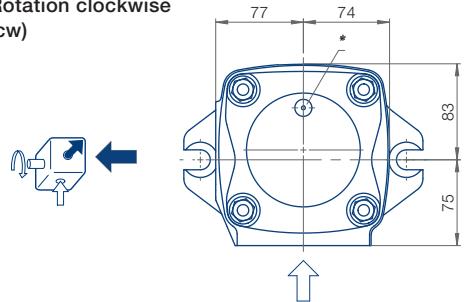Rotation clockwise (cw)





Rotation counter-clockwise (ccw)

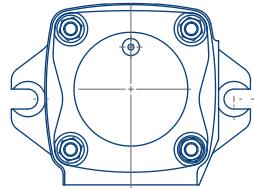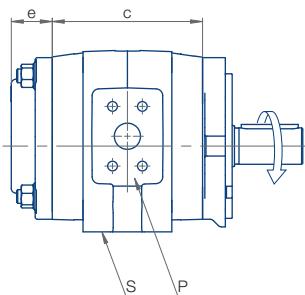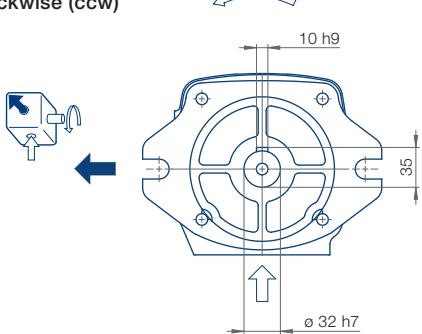

Pressure port (P)

Suction port (S)





















Type/ Delivery	c [mm]	e [mm]	g [mm]	h [mm]	i [mm]	k [mm]	l Thread	r [mm]	v [mm]	w Thread	Weight [kg]	SAE Flange No.
IPC 5 - 40	125	36	19	40	69.9	35.7	M12x20	52.4	26.2	M10x15	13.4	12
IPC 5 - 50	132	36	23	45	77.8	42.9	M12x20	52.4	26.2	M10x15	14.1	12
IPC 5 - 64	143	36	23	45	77.8	42.9	M12x20	52.4	26.2	M10x15	14.8	12

* Ensure the M10x1 plug screw, hexagon socket SW5, is tightened to a torque of 10 Nm during pumping operation.
Dependent on the pump position, filling or ventilation is possible here prior to commissioning.

Note! In case of oil-immersed installation of the oil pump flange variant 0 can not be used. For this special case, the flange version 7 will be used.

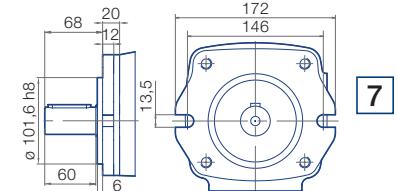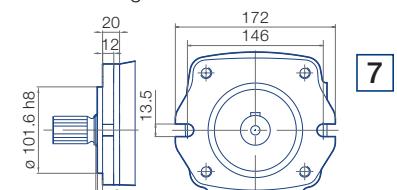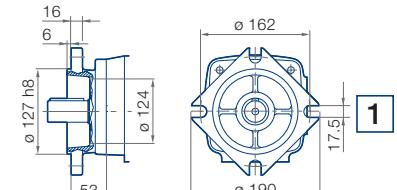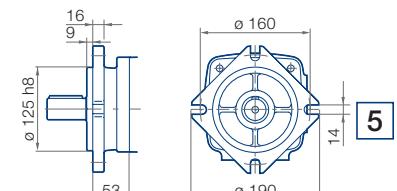


IPC Size 5, Designs and dimensions

Rotation, Suction port	Mounting flange	Shaft end
Standard		
Rotation clockwise, Suction port pump	SAE 2-hole flange 	Keyway connection 
 1	 0	 1
Variants		
Rotation counterclockwise, Suction port pump	SAE 2-hole flange 	Keyway connection 
 6	 0	 1
Rotation clockwise*, Suction port pump	SAE 2-hole flange  7	Keyway connection 
 1	 7	 1
Rotation counterclockwise*, Suction port pump	SAE 2-hole flange  7	Involute gearing 
 6	 7	 0
SAE 4-hole flange		Keyway connection
	 1	
	 1	 1
VDMA-4-hole flange		Keyway connection
	 5	
	 5	 1




* Direction of rotation free selectable in the illustrated mounting flange / shaft end combination.

IPC Size 6, Rotation and dimensions (mounting flange ①, shaft end ②)

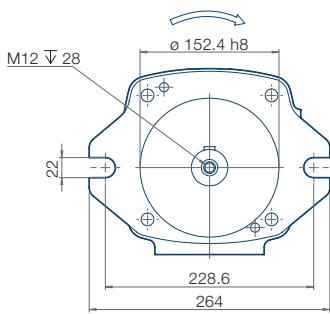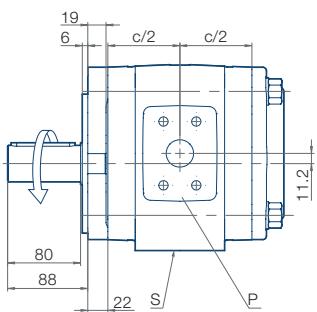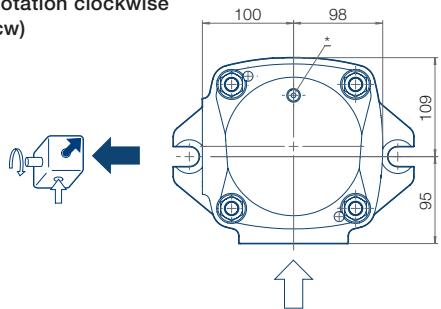
Rotation clockwise (cw)




Rotation counter-clockwise (ccw)

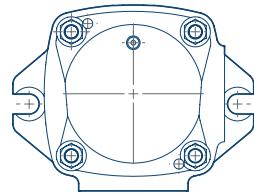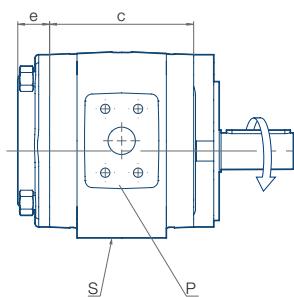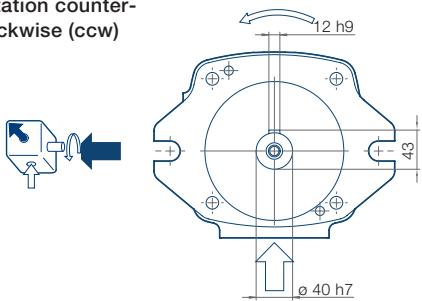

Pressure port (P)















Suction port (S)



Type / Delivery	c [mm]	e [mm]	g [mm]	h [mm]	i [mm]	k [mm]	Thread	r [mm]	v [mm]	w Thread	Weight [kg]	SAE Flange No.	
IPC 6 – 80	148	35	23	45	77.8	42.9	M12x20	69.9	36	M12x20	30.7	14	15
IPC 6 – 100	158	35	27	50	77.8	42.9	M12x20	69.9	36	M12x20	32.6	14	15
IPC 6 – 125	170	40	30	50	77.8	42.9	M12x20	69.9	36	M12x20	35.0	14	15

* Ensure the M10x1plug screw, hexagon socket SW5, is tightened to a torque of 10 Nm during pumping operation.
Dependent on the pump position, filling or ventilation is possible here prior to commissioning.

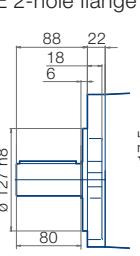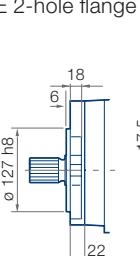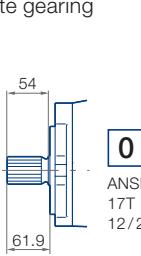


IPV Size 6, Designs and dimensions

Rotation, Suction port	Mounting flange	Shaft end
Standard Rotation clockwise, Suction port pump	SAE 2-hole flange 	Keyway connection 
Variants Rotation counterclockwise, Suction port pump	SAE 2-hole flange 	Keyway connection 
Rotation clockwise*, Suction port pump	SAE 2-hole flange 	Keyway connection 
Rotation counterclockwise*, Suction port pump	SAE 2-hole flange 	Involute gearing 
	SAE 4-hole flange 	Keyway connection 
	VDMA-4-hole flange 	Keyway connection 




* Direction of rotation free selectable in the illustrated mounting flange/shaft end combination.

IPC Size 7, Rotation and dimensions (mounting flange ①, shaft end ②)

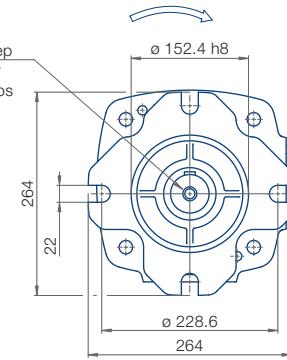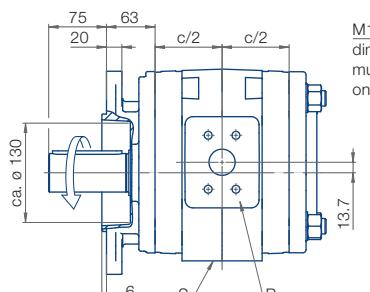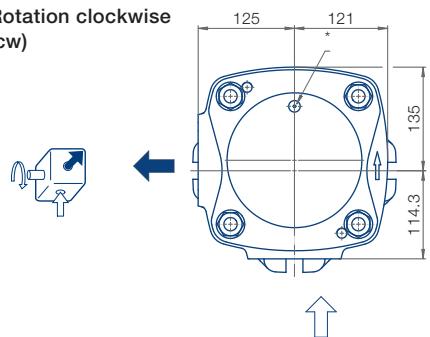
Rotation clockwise (cw)




Rotation counter-clockwise (ccw)

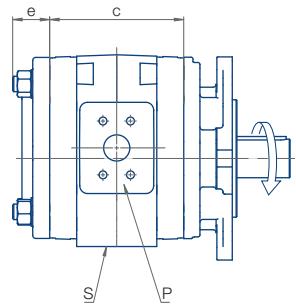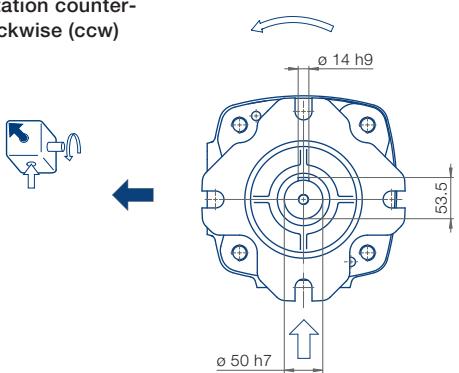

Pressure port (P)















Suction port (S)



Type/ Delivery	c [mm]	e [mm]	g [mm]	h [mm]	i [mm]	k [mm]	l Thread	r [mm]	v [mm]	w Thread	Weight [kg]	SAE Flange No.
IPC 7 - 160	162	48	30	56	88.9	50.8	M12x20	69.9	35.7	M12x20	50.0	14
IPC 7 - 200	174	46	34	62	88.9	50.8	M12x20	69.9	35.7	M12x20	54.0	14
IPC 7 - 250	188	42	38	72	106.3	61.9	M16x25	69.9	35.7	M12x20	59.0	14

* Ensure the M10x1plug screw, hexagon socket SW5, is tightened to a torque of 10 Nm during pumping operation.
Dependent on the pump position, filling or ventilation is possible here prior to commissioning.


IPV Size 7, Designs and dimensions

Rotation, Suction port	Mounting flange	Shaft end
Standard		
Rotation clockwise, Suction port pump	SAE 4-hole flange 	Keyway connection 
 1	 1	 1
Variants		
Rotation counterclockwise, Suction port pump	SAE 4-hole flange 	Keyway connection 
 6	 1	 1
Rotation clockwise*, Suction port pump	SAE 4-hole flange 	Involute gearing 
 1	 1	 0
Rotation counterclockwise*, Suction port pump	VDMA-4-hole flange 	Keyway connection 
 6	 5	 1


* Direction of rotation free selectable in the illustrated mounting flange/shaft end combination.

Measurement values – Airborne noise level (measuring location 1 m axial)

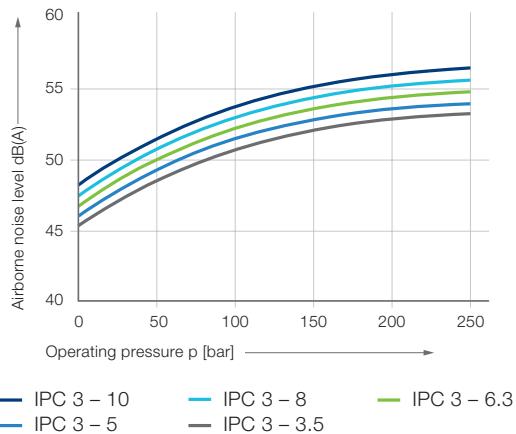
IPC 3




IPC 4

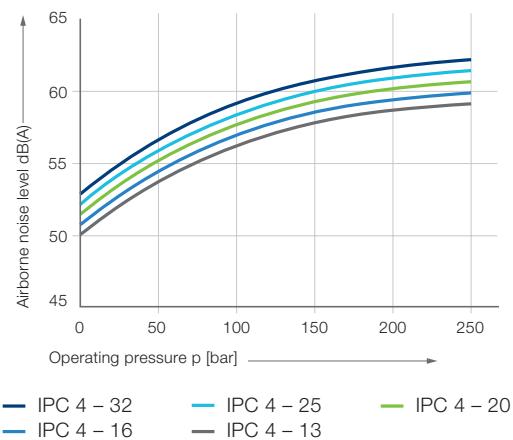


IPC 5

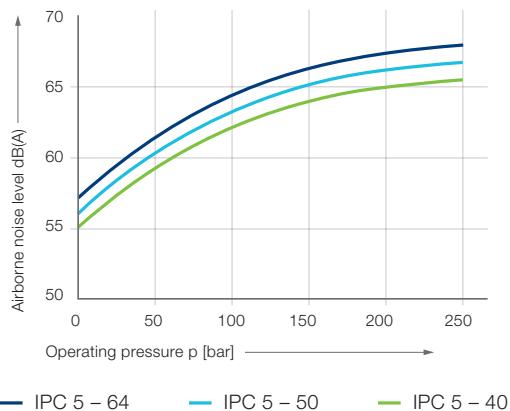

IPC 6

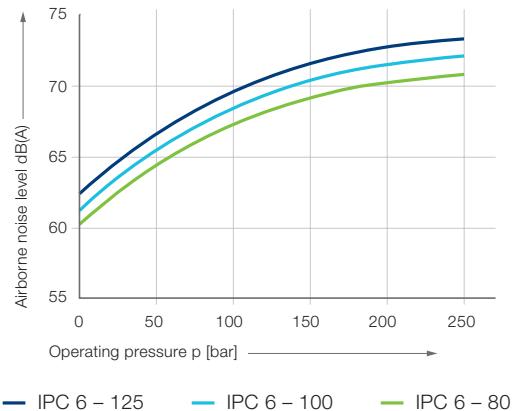

IPC 7

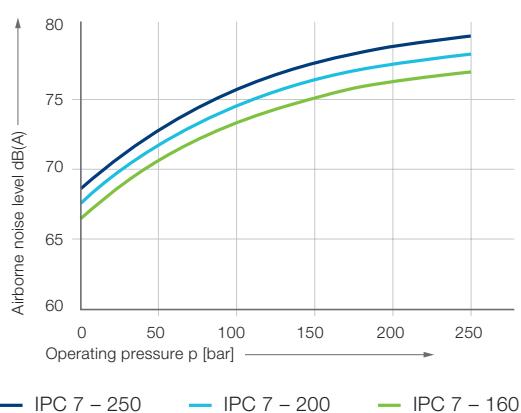

Measurement conditions


- Speed: 1 500 rpm
- Viscosity of pressure fluid: $46 \text{ mm}^2\text{s}^{-1}$
- Operating temperature: 40 °C

Note


Measurement taken in a low-noise room. In an anechoic room the measurements are approx. 5 dB(A) lower.

Measurement values – Efficiency η_v and η_g

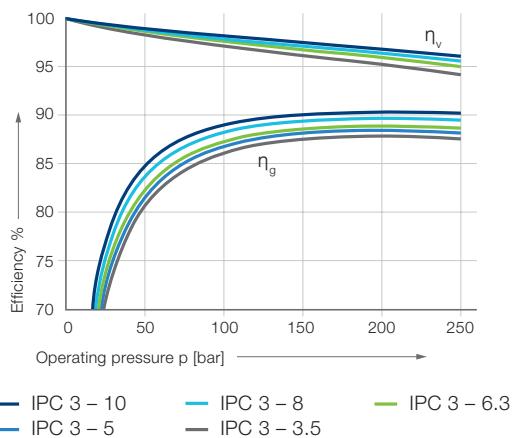
IPC 3




IPC 4

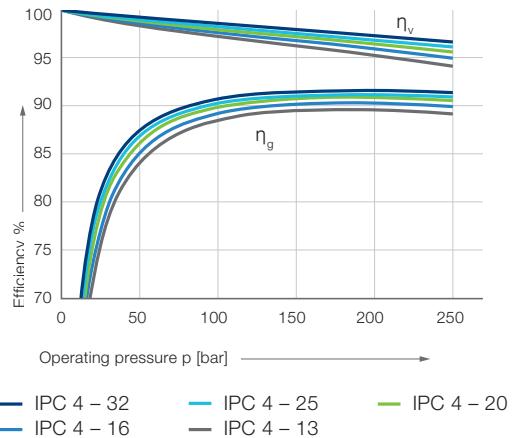


IPC 5

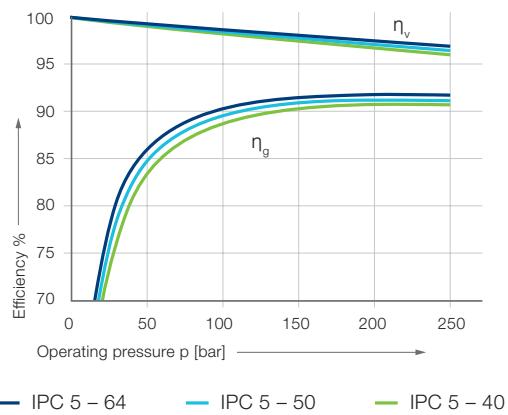

IPC 6

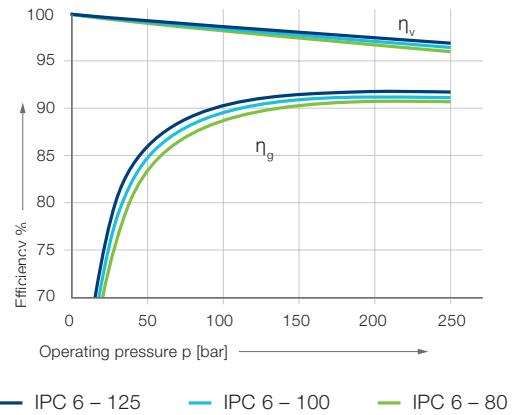


IPC 7

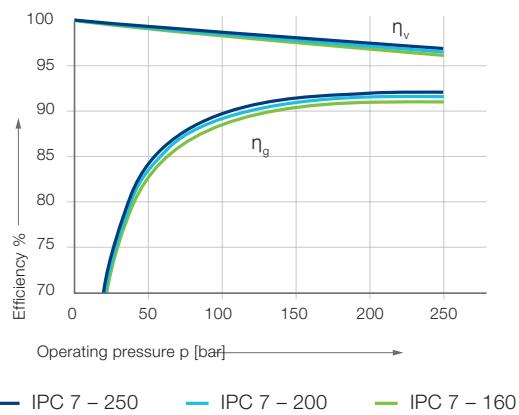

Measurement conditions

- Speed: 1 500 rpm
- Viscosity of pressure fluid: $46 \text{ mm}^2\text{s}^{-1}$
- Operating temperature: 40°C

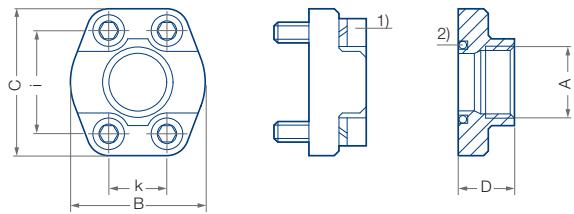Suction and pressure flange according to SAE...



Wrench torque for screws according to ISO 6162


¹⁾ Screw EN ISO 4762

²⁾ Round seal ring (O-Ring) ISO-R 1629 NBR

³⁾ Special design. Deviation from SAE J 518 C Code 61

SAE flange no.	A Thread	B [mm]	C [mm]	D [mm]	E ¹⁾ Seal ring	i [mm]	k [mm]	S ²⁾ Thread	Max. pressure [bar]
10	G 1/2	46	54	36	18.66 – 3.53	38.1	17.5	M8	345
11	G 3/4	50	65	36	24.99 – 3.53	47.6	22.3	M10	345
12	G 1	55	70	38	32.92 – 3.53	52.4	26.2	M10	345
13	G 1-1/4	68	79	41	37.69 – 3.53	58.7	30.2	M10	276
14³⁾	G 1-1/2	82	98	50	47.22 – 3.53	69.9	35.7	M12	345 ³⁾
30	G 1-1/2	78	93	45	47.22 – 3.53	69.9	35.7	M12	207
15	G 2	90	102	45	56.74 – 3.53	77.8	42.9	M12	207
16	G 2-1/2	105	114	50	69.44 – 3.53	88.9	50.8	M12	172
17	G 3	124	134	50	85.32 – 3.53	106.4	61.9	M16	138
17/2	G 3-1/2	136	152	48	98.02 – 3.53	120.7	69.9	M16	35
18	G 4	146	162	48	110.72 – 3.53	130.2	77.8	M16	34
SAE J 518 C Code 61	50	G 1/2	46	54	18.66 – 3.35	40.5	18.2	M8	414
	51	G 3/4	55	71	24.99 – 3.53	50.8	23.8	M10	414
	52	G 1	65	81	32.92 – 3.53	57.2	27.8	M12	414
	53a	G 1-1/4	78	95	37.69 – 3.53	66.6	31.8	M14	414
	54	G 1-1/2	94	112	47.22 – 3.53	79.3	36.5	M16	414
	55	G 2	114	134	56.75 – 3.53	96.8	44.5	M20	400
	56	G 2-1/2	152	180	69.45 – 3.53	123.8	58.8	M24	400

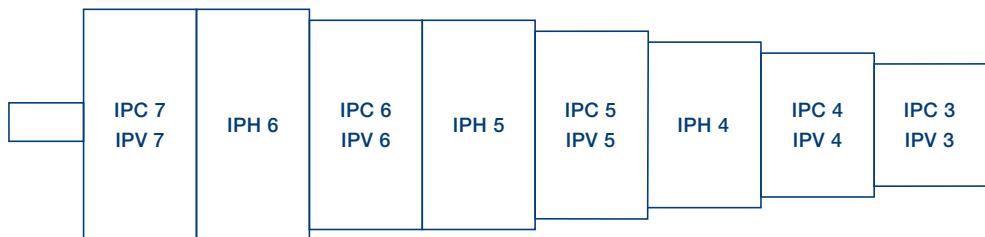Multi-flow pumps, pump combinations, pump combinations in order of type and size



Combinations of IPC pumps

- IPC pumps of identical or different sizes can be combined in multiflow pumps.
- All sizes of the relevant pump volume are available as two- or three-flow pumps; four-flow pumps must be designed by Voith.
- The pumps are arranged in increasing order according to frame size and delivery.

Selection

1. Determine pressure ranges and define the appropriate pump serie(s).
2. Determine pump volume and select the appropriate size(s).
3. Define sequence of the pumps.
4. Check the torques.
5. Determine rotation and suction.
6. Specify mounting flange and shaft end.

Combinations of IPC/IP...-pumps

- It is possible to combine IPC pumps with other Voith pump series (e.g. medium-pressure pumps IPC).
- The pumps are arranged by types and sizes as shown in the illustration above.
- If identical types or identical sizes follow each other, the pump with the higher pump flow is placed closer to the drive.

Mounting, assembly


- Multi-flow pumps are generally mounted to the drive by means of a flange. All information about the flange design and shaft end is found in the catalog of the relevant pump series.
- For more information, for example about definition of the adapter housings, refer to brochure G 1714 (Voith multi-flow pump).

Designs

Rotation and suction	Mounting flange				Shaft end	
clockwise (cw)   counter-clockwise (ccw)						
	 2	 7		 0	 1	 1
	 1	 6		 4	 5	 0
	 2	 7		 7	For designs and dimensions, see catalog of the relevant pump series.	
	 1	 6		 0	For designs and dimensions, see catalog of the relevant pump series	
	 3	 8		 1	SAE-2-hole-flange	
	 3	 8		 4	SAE-4-hole-flange	
Special design	 4	 9	Special design	 5	VDMA-2-hole flange	
				 7	VDMA-4-hole flange	
					 7	
					SAE-2-hole-flange (variant)	


Allowed input torques

Size	A [Nm]	B [Nm]
3	160	80
4	335	190
5	605	400
6	1 050	780
7	1 960	1 200

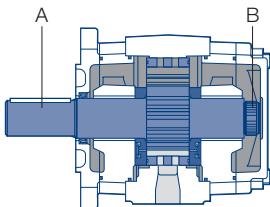

Type code

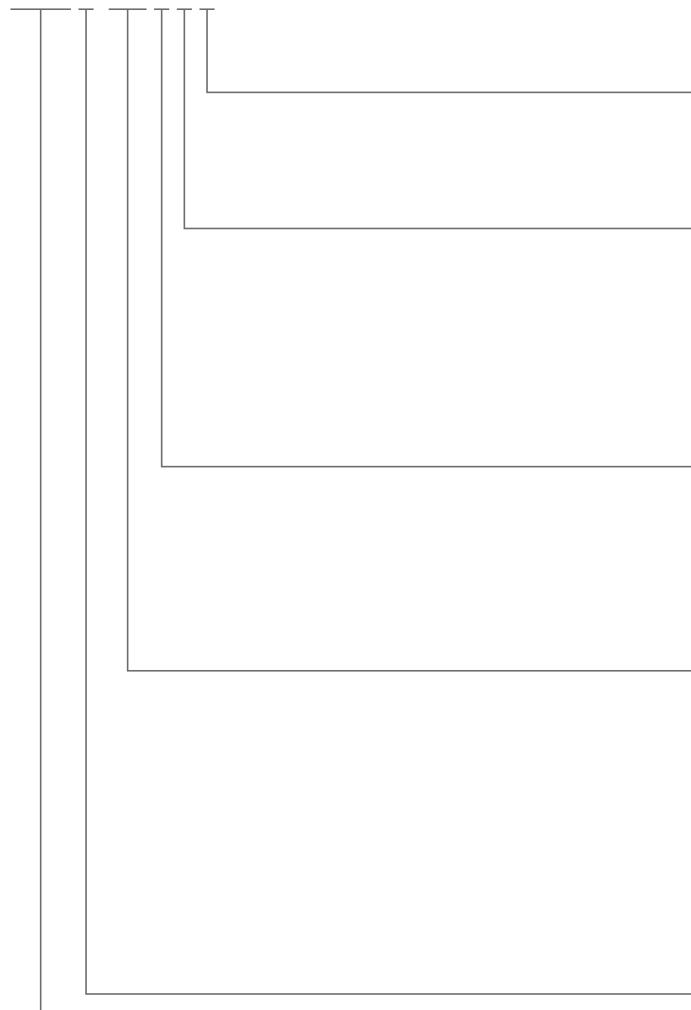IPC 3-3.5 101



- Shaft end

- 0 Splined gear shaft ANSI B92.1a
 - 1 Parallel shaft with keyway

- Mounting flange

- 0 SAE-2-hole
 - 1 SAE-4-hole
 - 4 VDMA-2-hole
 - 5 VDMA-4-hole
 - 7 SAE-2-hole, variant

- Rotation, Suction port

- 1 Clockwise rotation, suction port pump
 - 6 Anti-clockwise rotation, suction port pump
 - 4 Clockwise rotation, special design
 - 9 Anti-clockwise rotation, special design

- Delivery

Size	Delivery				
3	3.5	5	6.3	8	10
4	13	16	20	25	32
5	32	40	50	64	
6	64	80	100	125	
7	125	160	200	250	

- Size

- Type

This is a translated document

Original language: German.

Legally binding language version of the document: German.

Voith Group
St. Poeltener Str. 43
89522 Heidenheim
Germany

www.voith.com/hydraulic-systems

Contact:
Phone +49 7152 992 3
sales-rut@voith.com



VOITH
Inspiring Technology
for Generations